


Fred V. Fowler Company, Inc.



Precision Frame Spirit Levels

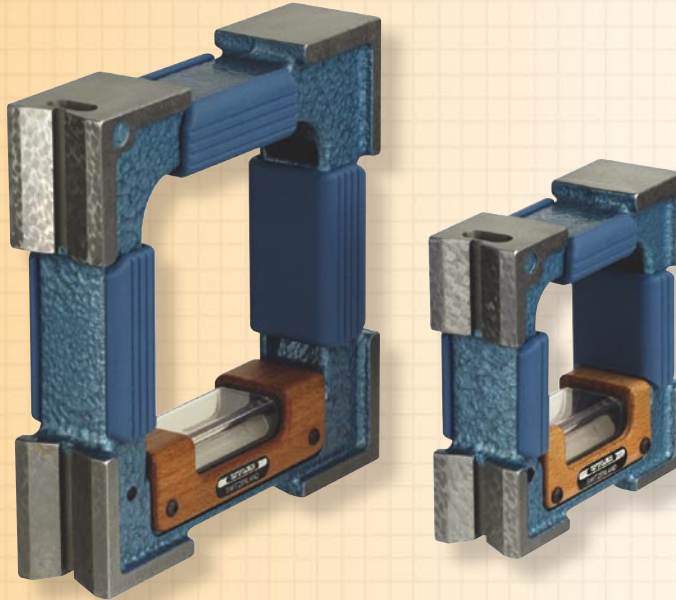

▲ Left to right: No. 53-422-057 and No. 53-422-058

Wyler's Precision Frame Spirit Levels are used for adjusting and checking horizontal and vertical surfaces and shafts. Sensitivity .0005" per 10". The Level features two prismatic sides. Also comes equipped with an insulating handle.

Special Features:

- A clear view of the main vial can be observed not only from above but also from both sides. This full view allows position of the bubble to be read easily.
- The longitudinal vial which is set in a steel tube is not subject to the casting stresses of the usual, simple designs. Besides the other features, this makes for greater accuracy and reliability of the Fowler range.
- Includes wooden case.
- Simple adjustment system.
- Stability of twist to $\pm 5^\circ$.
- Fully in compliance with DIN standards.

Order No.	Inch	Metric	Sensitivity Angular	Overall Dimensions
53-422-057	.0005"/10"	.05mm/m	10 sec.	6" x 1-1/2" x 6" (150mm x 40mm x 150mm)
53-422-058	.0005"/10"	.05mm/m	10 sec.	4" x 1-1/4" x 4" (100mm x 32mm x 100mm)
53-422-059	.0005"/10"	.05mm/m	10 sec.	7-7/8" x 1-5/8" x 7-7/8" (200mm x 40mm x 200mm)