


Model No. 900-370

Digital Motorized Twin Tester



**Standard Rockwell
and
Superficial Rockwell
1 unit!**

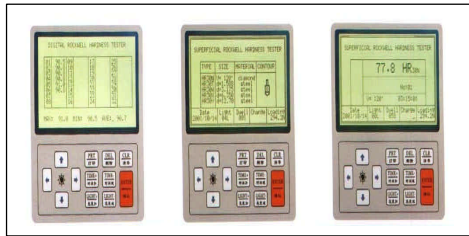

283 Veterans Boulevard Carlstadt NJ 07072
Tel: (201) 933-6300 Fax: (201) 933-3801
www.phase2plus.com

Features:

- Digitally computes regular Rockwell® and Superficial hardness scales in one versatile tester
- Easily converts scales with the push of a button
- Complete micro-computer controlled operation affords highly sensitive and accurate readings
- Extended memory of up to 9999 test results
- Conversions to: Brinell and Vickers hardness scales
- Built-in mini printer
- Conforms to ASTM E-18

Specifications:

Minor Load	3 Kgf, 10 Kgf
Major Load	15Kgf 60 Kgf 30 Kgf 100 Kgf 45 Kgf 150 Kgf
Test Force Application	Dead Weight
Test Force Control	Motorized
Results Display	Digital Readout
Vertical Capacity	7.0 in.
Throat Depth	6.2 in.
Height	31.4 in.
Width	21.6 in.
Depth	10.2 in.
Shipping Weight	150 lbs

Hardness Scales: HRA B,C,D,E,F,G,H,K (superficial) HR15N, HR15T, HR30N, HR30T, HR45N, HR45T

Accessories:

- C-scale Diamond Indentor
- N-scale Diamond Indentor
- 1/16" Ball Indentor
- 2- HRC Test Blocks
- 1- HRB Test Block
- 1- HR30N Test Block
- 1- HR30T Test Block
- Test Table 5.87" (150mm)
- Flat Anvil 2.5" (63mm)
- Spot Anvil .38" (10mm)
- Std. Vee Anvil
- Built-in Micro printer
- RS232 Serial Port/Data Cable
- Digital Test Counter
- Statistics (avg, min, max, range, sd)
- Accessory Case
- Dust Cover



283 Veterans Boulevard Carlstadt NJ 07072
Tel: (201) 933-6300 Fax: (201) 933-3801
www.phase2plus.com